

Commercial SERIES
5-Ply Fire Rated Doors
WDMA Extra Heavy Duty
FD-5

Construction

Faces: Available in a variety of domestic and exotic wood species and MDO.

Veneer Grade: WDMA "A" Grade-Book and running match standard. AWI, other grades, and assemblies by request.

Construction Grade: WDMA—Extra Heavy-Duty-Standard.


Cores: Non-Asbestos. Fire doors are produced in compliance with NFPA 80 and are WHI Labeled. UL by request. Available in 45, 60, and 90 minute ratings. Neutral Pressure-Standard. Positive Pressure by request.

Vertical Edges: Special construction to meet fire label requirements. Fir edges standard. Matching veneered edges by request.

Horizontal Edges: Special construction to meet fire label requirements.

Adhesive: Type II Bond. Type I by request.

Finishes: WDMA TR-6 and OP-6. AWI 1500 Premium Acrylated UV Curable Epoxy. Also available with Mohawk's exclusive DigiTech (digital technology) with UV topcoat.

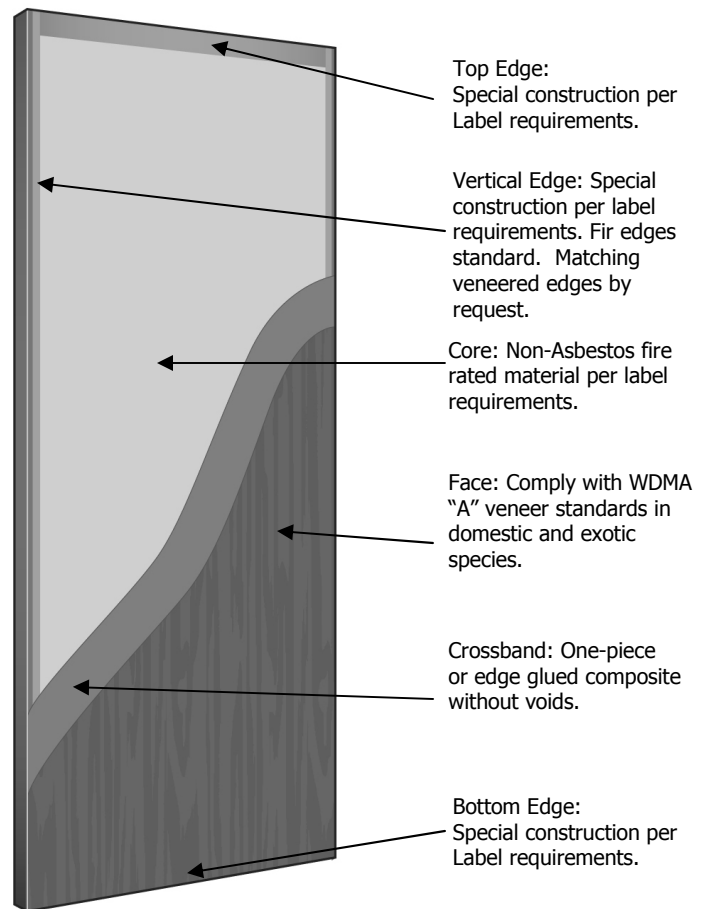

- *5-year Warranty Standard. Lifetime by request.*
- *Security Rating - 30*
- *LEED 2.1 Credit Options: MR 5.1*

Industry Standards

Quality Assurance / Industry Standards: WDMA

Performance: WDMA—Extra Heavy Duty

Applications: Architectural Projects that require 5-ply Heavy Duty doors.

Maximum Size: 4/0 X 10/0

Thickness: 1 3/4" only.

Construction: Edgebonded Standard.